naturaled®

PROJECT:	
SCHEDULE:	**DATE:**
PREPARE BY:	
NOTES:	

BLD 5.5 BOLLARD

DESCRIPTION

naturaLED® 5.5 BLD bright pathway lighting is important for the safety of pedestrian foot traffic. Ensuring that sidewalks and pavement are well lit reduces the risk of people tripping and falling. The superior quality of our DLC Bollard light fixture provides glare-free lighting with selectable wattages and color temperature that replaces up to 2,100 lumens.



IP65 · 5 YEAR WARRANTY · 3 CCT SELECT · ADJUSTABLE WATTAGE 3

Rated Life 50,000 Hours
Warranty 5 Years

APPLICATIONS

Security, Pathway, Perimeter, Entryway, Area Lighting

FEATURES

- DLC Premium
- IP65 Rated
- ETL Listed
- Selectable Wattages: 10/15/18W
- Color Temp Selectable: 3CCT (3000/4000/5000K)
- Voltage: 120-277V
- Power factor: >0.9
- Surge Protection: 10KV
- Beam Angle: 360°
- Dimmable: 0-10V
- CRI: 80
- Operating temperature: - 40°F - 122°F
- Energy savings up to 80% compared to metal halide bollards
- 5.5" diameter makes easy replacement for traditional bollards
- Available in Louvers, Cone (Flat / Round Top)
- Material: Die Cast Aluminum
- Color: Black (RAL#9005)
- 5 Year Warranty
- Optional accessories for purchase: Type 3 Plate

ACCESSORIES



Type 3 Plate

SAMPLE NUMBER FX5.5BLD18SW/41FCN/8CCT3/BK

FAMILY	DIAMETER	SERIES	WATTAGE	LENGTH/SHAPE	CRI/COLOR TEMP	COLOR
FX Fixture	5.5 5.5-inch	BLD Bollard	18SW Selectable Wattage (10/15/18W)	41FCN 41-42 inch FCN -Flat Cone FLV- Flat Louver Reflector RCN -Round Cone RLV- Round Louver Reflector	8CCT3 CRI 80 Selectable CCT (3000/4000/5000K)	BK Black

DLC LISTED PREMIUM · ENERGY STAR · ETL Intertek · FC · LM 79 · LM 80 · RoHS COMPLIANT · TITLE 24

© 2023 naturaLED® All rights reserved

ORDERING

*P= Premium DLC / *S = Standard DLC / *E = Energy Star

	Watts (W)	Ordering Code	Description	CCT (K)	Lumens (Lm)	Equivalent Wattage	Size	IP65 Rated	DLC (S/P)
Flat	10/15/18	**9643**	FX5.5BLD18SW/41FCN/8CCT3/BK	3CCT (3K/4K/5K)	1,200 1,800 2,160	100	5.5″x41″	•	P
Flat	10/15/18	**9644**	FX5.5BLD18SW/41FLV/8CCT3/BK	3CCT (3K/4K/5K)	1,200 1,800 2,160	100	5.5″x41″	•	E
Round	10/15/18	**9645**	FX5.5BLD18SW/42RCN/8CCT3/BK	3CCT (3K/4K/5K)	1,200 1,800 2,160	100	5.5″x42″	•	P
Round	10/15/18	**9646**	FX5.5BLD18SW/42RLV/8CCT3/BK	3CCT (3K/4K/5K)	1,200 1,800 2,160	100	5.5″x42″	•	E

ACCESSORIES (Ordered Separately)

Type 3 Plate



P10068 PLT-5.5BLD/T3/BK
(Plate-Type 3 plate for 5.5″ bollard)

© 2023 naturaLED® All rights reserved

DIMENSIONS

Round
11-lbs

Flat
11-lbs

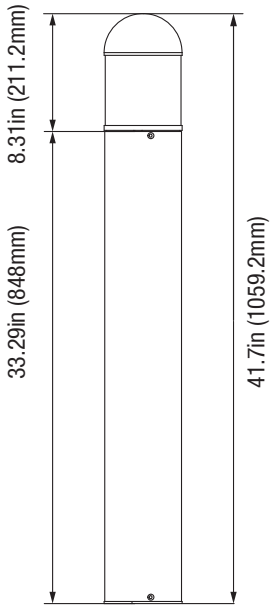



Bollard Base

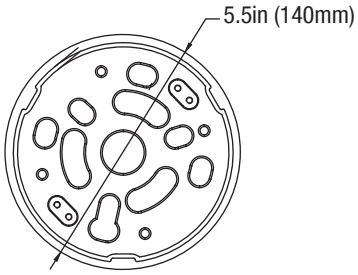

Suggested install point

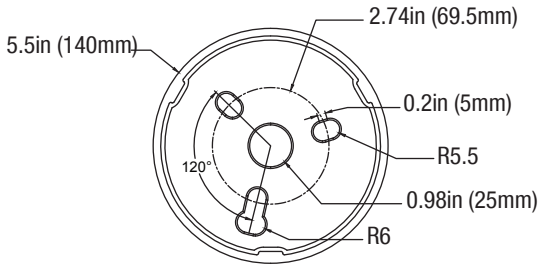

STYLE



Flat Cone Reflector
Model: FCN



Flat Louver Reflector
Model: FLV



Round Cone Reflector
Model: RCN



Round Louver Reflector
Model: RLV





© 2023 naturaLED® All rights reserved

PHOTOMETRICS CHART

Cone Reflector (Flat)
DLC Premium





Louver (Flat)
Energy Star





Cone Reflector (Round)
DLC Premium





Louver (Round)
Energy Star





PACKAGE

Case Qty 1 pc



© 2023 naturaLED® All rights reserved