

PROJECT:

SCHEDULE:DATE:

PREPARE BY:

NOTES:

SWP

Slim Wall Pack CCT3

DESCRIPTION

The naturaLED® slim, low-profile cutoff wall pack features a smooth, contemporary design that meets ADA compliance for quality and accessibility. Crafted from high-quality, well-engineered die-cast aluminum, it delivers bright, crisp illumination with excellent thermal management to ensure long-lasting performance. Designed for easy installation, it features an adjustable angle and a hinged junction box for added convenience. Our 45-Watt Slim Wall Packs are available in selectable wattage and color temperature options in Black and Bronze finishes. The SWP is ideal for landscape lighting, wall and surface mounting, low-level pathways, apartment buildings, schools, and multi-use facilities.

APPLICATIONS

Security, Pathway, Perimeter, Entryway, Area Lighting, and Building Facades



Dusk to Dawn

5 YEAR WARRANTY

IP65

Adjustable Angle

0°-90°

ADA
Americans with Disabilities Act

CCT SELECT 3

ADJUSTABLE WATTAGE 3

Rated Life Hours 50,000
Warranty 5 Years

FEATURES

- DLC Premium
- IP65 Rated
- ETL/cETL Listed
- ADA Compliance (4" Depth)
- Wattage & Color Selectable
- Wattage: 15~45W
- Color Temp: CCT3 (30/40/50K)
- Voltage: 120-347V
- Surge Protection: 4KV
- Dimmable: 0-10V
- CRI: >80
- Operating Temperature: -22°F to 122°F
- Beam Angle: 140°
- Adjustable Fixture Angle
- 1/2" NPT Knock Out
- Photocell Sensor Included
- Lens: Polycarbonate Lens
- Material: Die Cast Aluminum
- Color: Bronze / Black
- Optional Accessories for Purchase: Knuckle Mount, Slip Fitter, Swivel Bracket
- Warranty: 5-Year Limited Warranty

ACCESSORIES

	Knuckle Mount
	Slip Fitter
	Swivel Bracket

SAMPLE NUMBER FXSWP45SW/8CCT3/BK/347-PHO					
SERIES	WATTAGE	COLOR TEMP	COLOR	VOLTAGE	ACCESSORY
SWP Slim Wall Pack	45SW <45 Selectable Wattages	8CCT3 CRI 80 3CCT(3000/4000/5000K)	BK Black	347 120-347V	PHO Photocell Included

SLIM WALL PACK CCT3

WALL & AREA LUMINAIRES

ORDERING

*P= Premium DLC / *S = Standard DLC

Ordering Code	Description	Watts (W)	Lumens (Lm)	CCT (K)	Equiv. Wattage (W)	Voltage	Color	IP65 Rated	DLC (S/P)
9589	FXSWP45SW/8CCT3/BZ/347-PHO	15	1,800	3CCT	100-250W	120-347V	Bronze	•	P
		28	3,360	(30/40/50K)					
		45	5,400						
9590	FXSWP45SW/8CCT3/BK/347-PHO	15	1,800	3CCT	100-250W	120-347V	Black	•	P
		28	3,360	(30/40/50K)					
		45	5,400						

Accessible for Americans with Disability Act

ACCESSORIES



Knuckle Mount

P10254 MT-KNC-SWP/BZ

(3/4" NPT Knuckle Mount for SWP - Bronze)

P10006 MT-KNC-SWP/BK

(3/4" NPT Knuckle Mount for SWP - Black)



Slip Fitter

P10255 MT-SF-SWP/BZ

(Slip Fitter Mount for SWP - Bronze)

P10007 MT-SF-SWP/BK

(Slip Fitter Mount for SWP - Black)



Swivel Bracket

P10253 MT-SB-SWP/BZ

(Swivel Bracket for SWP - Bronze)

P10005 MT-SB-SWP/BK

(Swivel Bracket for SWP - Black)

9.4in (240mm)


SLIM WALL PACK CCT3

WALL & AREA LUMINAIRES

DIMENSIONS


15/28/45 S/Wattage

4.40-lbs

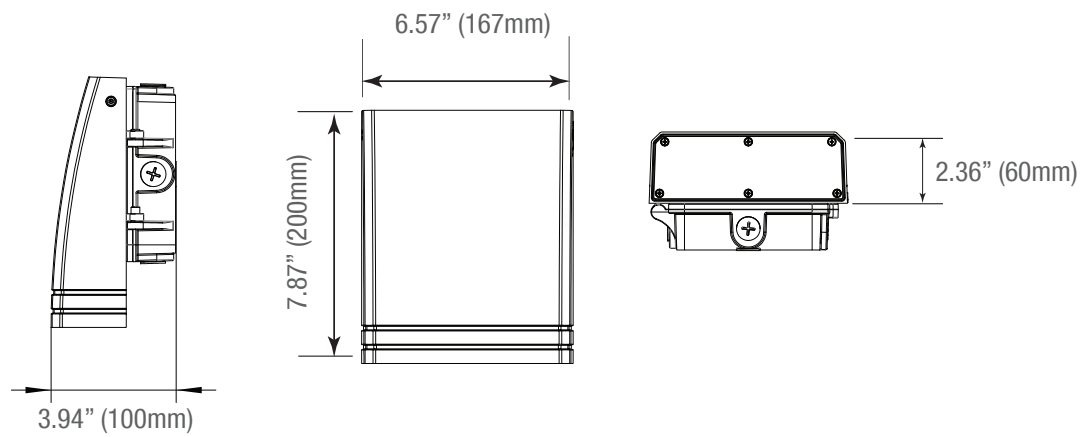

PACKAGE

	Master Carton (pc)	Dimensions (in)	Weight (lb)
45 S/W	5	27.95"x8.46"x11.02"	24.24



PHOTOMETRICS

15/28/45 S/ Wattage

BUG rating B2 U1 G1

