

## INSTALLATION AND OPERATING INSTRUCTIONS

### IMPORTANT: READ ALL INSTRUCTIONS BEFORE THE INSTALLATION

**WARNING:** Risk of fire or electric shock. The installation should be performed only by a qualified electrician in accordance with the National Electrical Code and relevant local codes. This product must be installed in full accordance with applicable.

**TO PREVENT ELECTRICAL SHOCK, MAKE SURE TO TURN OFF MAIN POWER SWITCH PRIOR TO THE INSTALLATION.**


### INSTALLATION INSTRUCTIONS

- Ensure that the ambient temperatures are within the luminaire's rated limits.
- Check the nameplate's marking for more information.
- Unpack the luminaire and the mounting hardware kit.


### SURFACE MOUNT

1. Remove the cover (C) by unscrewing the twist latch (E) from the other end.
2. Fix the socket using the screw.
3. Use the luminaire as a template by placing it on the junction box and pending in the four hole position. Put the luminaire aside and drill the four holes. Insert an anchoring bolt (not included) into each hole.
4. Secure the luminaire into place with the help of mounting screws (not included) making sure to pass the junction box cables on the side of the luminaire.
5. Connect luminaire wires to junction box wires (wire connectors not included) as follows: ground wire to manufacturer's ground wire, LIVE wire to manufacturer's power wire, neutral wire to manufacturer's neutral wire.
6. Put the cover (C) on the installed luminaire and secure into place with the twist latch (E) and the screw (F) from either end.
- CAUTION! Carefully push the connecting wires into the luminaire carefully.**
7. Install the lamps in the luminaire.
8. Turn on the luminaire.

### Single Tube Fixture

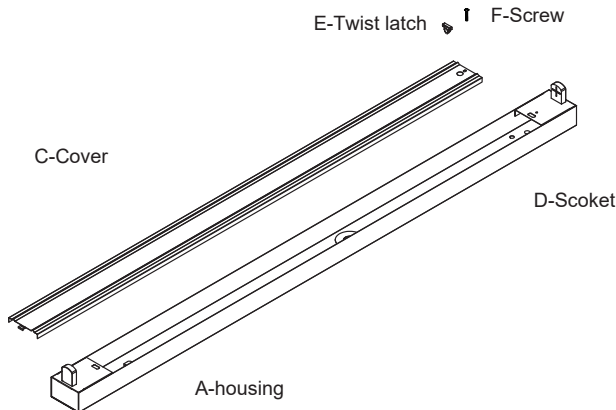


### Double Tube Fixture

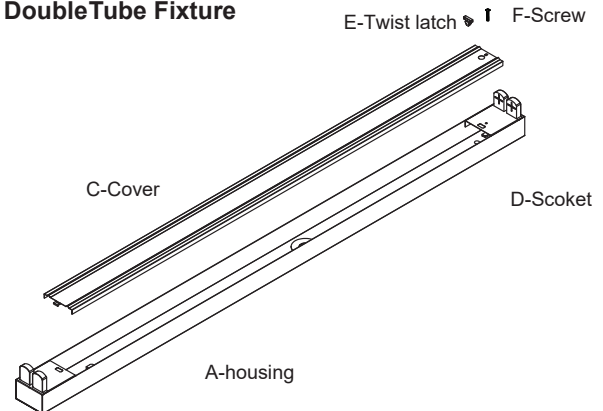


### Method of Connecting Wire


#### TYPE B(Bypass) Single Tube




#### TYPE B(Bypass) Double Tube


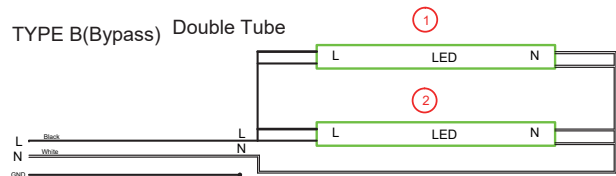


#### TYPE C Single Tube

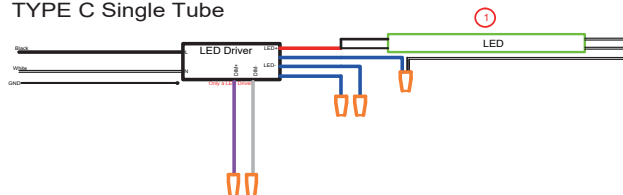

#### TYPE C Double Tube

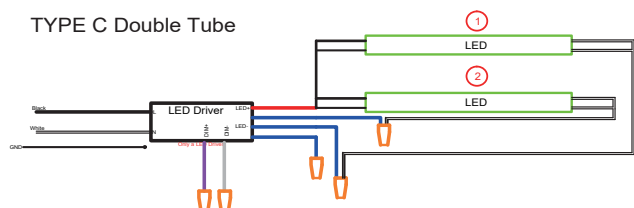

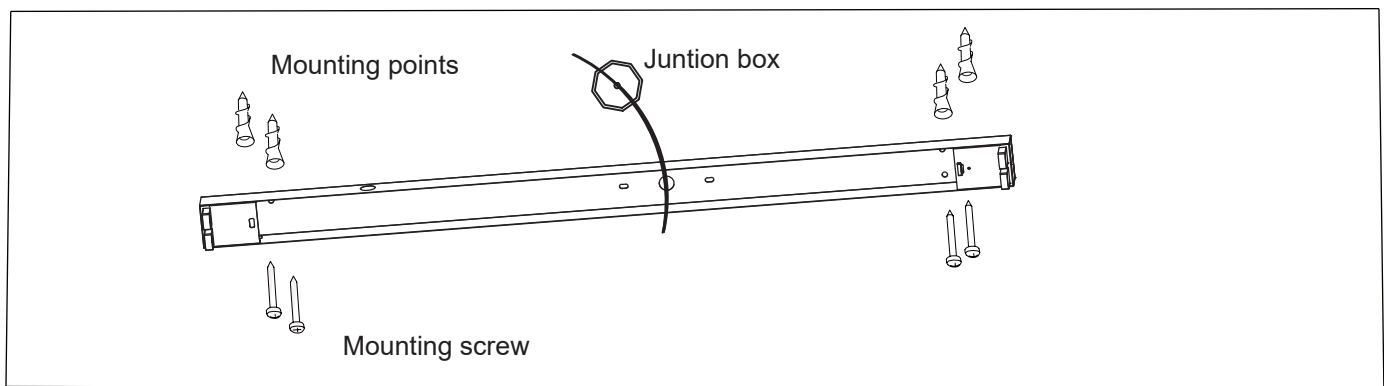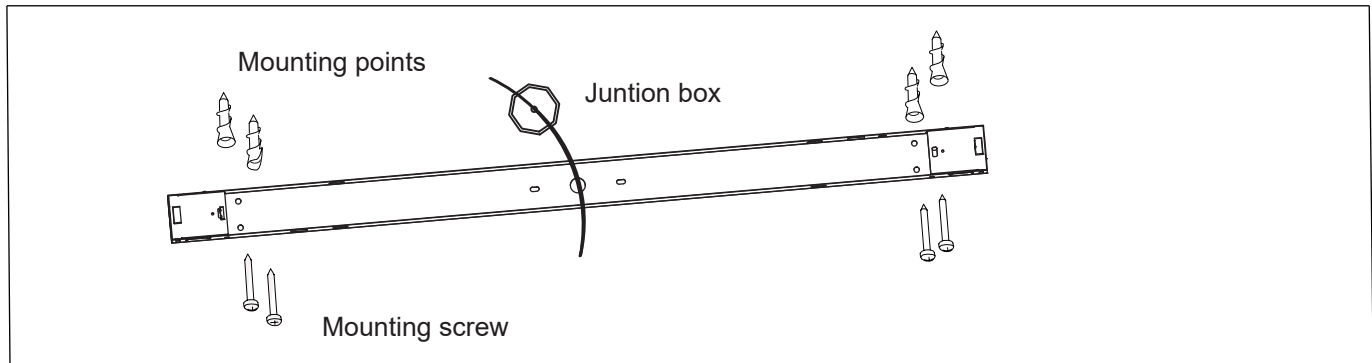**INSTALLATION AND OPERATING INSTRUCTIONS****LAMP INSTALLATION**

Put the lamp in the socket then turn it.

