

1000 Watt Pulse Start Lamp

71722

DATA SHEET



UNI-FORM
PULSE START METAL HALIDE LIGHTING SYSTEMS

MS 1000W/BU/BT37/PS/740

GENERAL Characteristics

Lamp Type	MH Pulse Start Single Ended
ANSI Code	M141/E
Bulb Shape	BT37
Base Type	Mogul (E39)
Bulb Finish	Clear
Rated Life	12000 hours
Operating Position	Base Up $\pm 15^\circ$
Dimming	50% Rated Power

ELECTRICAL

Lamp Watts	1000
Lamp Oper. Voltage (Nom.)	263

SUSTAINABILITY

Recycling Program	Smartpac® 800-451-2606
-------------------	------------------------

PHOTOMETRIC



Initial Lumens	115000
Scotopic Lumens (S/P 1.7)	195000
Lumens Per Watt	115
Lamp Lumen Depreciation (LLD)	.75 (75%) @ 4800 hours
Correlated Color Temperature	4000K
Chromaticity Coordinates (CIE-x,y)	.385 .390
Color Rendering Index (CRI)	68

NOTES



Lamp performance ratings published in this data sheet are based on operation with magnetic ballasts. Performance of position-rated lamps outside of their tolerances will result in poor performance. Minimum Starting Temperature: $-40^\circ\text{C}/^\circ\text{F}$. To calculate nighttime Scotopic lumens, multiply the lumen rating by the S/P ratio.

PHYSICAL

Bulb Diameter	4.6" (120mm)
Max. Overall Length (MOL)	11.5" (292mm)
Light Center Length (LCL)	7.0" (178mm)
Effective Arc Length	81.5 mm
Max. Base Temperature ($^\circ\text{C}$)	250
Max. Bulb Temperature ($^\circ\text{C}$)	450
Socket Pulse Rating (KV)	4
Luminaire Type	Enclosed Rated



Dia. = 4.6" (120mm)
MOL = 11.5" (292mm)
LCL = 7.0" (178mm)
Base = Mogul (E39)

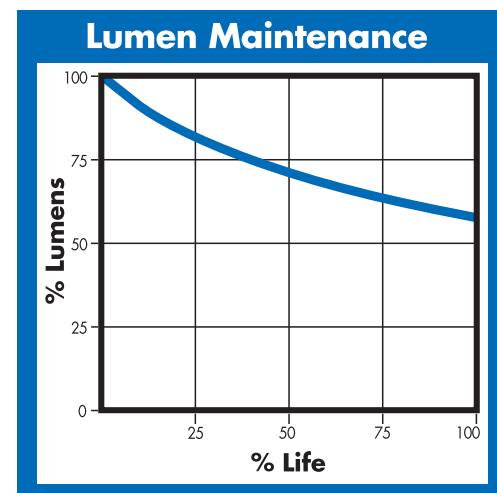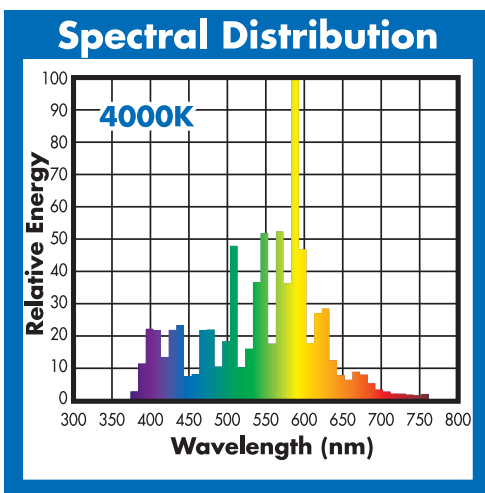

(800) 451-2606
or (440) 248-3510

Fax: (800) 451-2605
7905 Cochran Road
Glenwillow, Ohio 44139 USA
E-mail: venture@adlt.com
VentureLighting.com

THIS LAMP CONFORMS TO FEDERAL STANDARD 21 CFR 1040.30

Warning: This lamp can cause skin burn and eye inflammation from shortwave ultraviolet radiation if outer envelope of the lamp is broken or punctured. Do not use where people will remain for more than a few minutes unless adequate shielding or other safety precautions are used. Lamps that will automatically extinguish when outer envelope is broken or punctured are commercially available.

This Product is Recyclable Through  **Smartpac**
WED RECYCLING SERVICE