




LED AREA LIGHT SHOEBOX GEN 4

200W, 120-277V, 5000K Morris

CAT#: 74058C



Note: Yoke Mount (Item #: 74036C)
Sold Separately

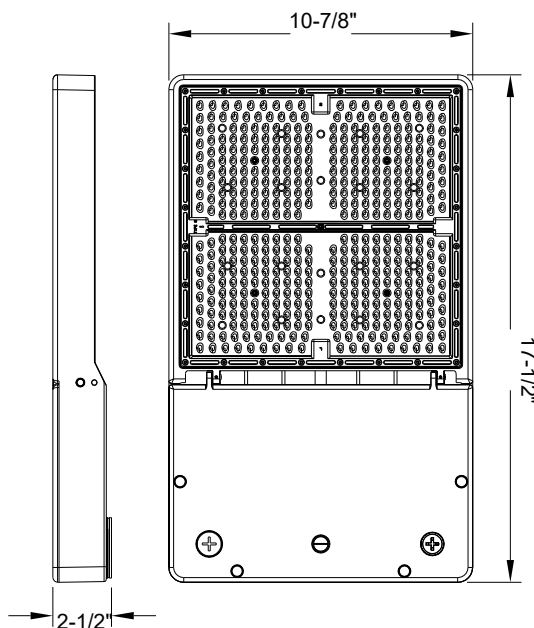


Features:

- SMD 3030 LEDs
- Corrosion resistant Die Cast Aluminum housing
- Polycarbonate Optic Lens
- Superior Architectural Powder Coat Finish
- Stainless Steel Hardware
- Photo Control must be Purchased Separately
- Light Pattern: Type IV
- IP65 (NEMA 4X) Dust & Water Tight
- cULus Listed for Wet Locations
- 5 Year Warranty

Part#	Housing Color	Wattage	Lumens	CCT	Voltage	Beam Angle	Lumens/Watt	
74058C	Bronze	200W	26,647	5000K	120-277V	121°	134lm/w	



PHOTOMETRY

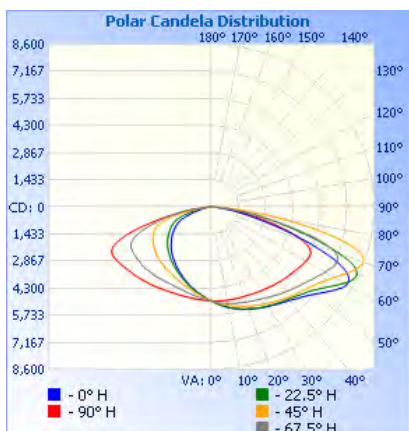

Illuminance at a Distance

Center Beam fc	Beam Width
17.2 ft	38.0 ft 60.0 ft
4.31 ft	76.0 ft 120.0 ft
1.91 ft	114.0 ft 179.9 ft
1.08 ft	152.1 ft 239.9 ft
0.69 ft	190.1 ft 299.9 ft
0.48 ft	228.1 ft 359.9 ft

Vert. Spread: 96.4°
Horiz. Spread: 120.9°

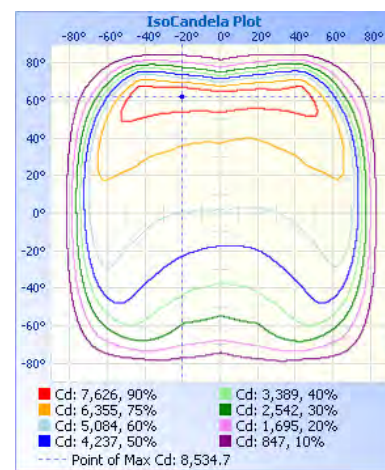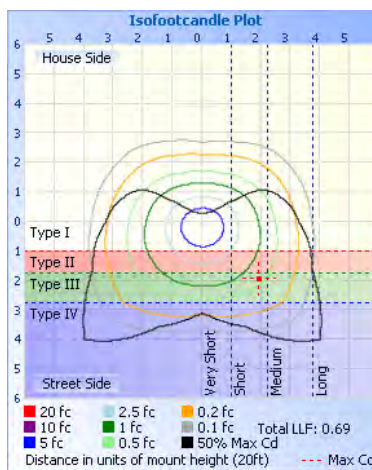



LED AREA LIGHT SHOEBOX GEN 4

200W, 120-277V, 5000K

Morris CAT#: 74058C

Technical Specifications:

Electrical:

Input Voltage: 120-277V

Current: 0.76A @ 277V

Frequency: 60Hz

Power Factor: ≥ 0.9

THD: 15.5% @ 277V

Product Parameters:

200 Watts

Efficacy: 134 lumens per watt

50,000+ LED Life Span

CCT: 5000K

Chromaticity Measurements:

Beam Angle: 121°

CRI: 72

R9: -33

DUV: -0.0002

Chromaticity (x,y): $x=0.4377$; $y=0.4038$

Chromaticity (u,v): $u=0.2512$; $v=0.5214$

Component Specifications:

LED: SMD3030

Driver Voltage: 120-277V

Frequency: 50-60HZ

Dimming: 0-10V

Operating Temperature:

Minimum Starting: -22°F To 122°F

Construction:

Housing: Corrosion resistant Die Cast Aluminum housing

IP Rating: IP65 Wet Location Rated

Lens Material: Polycarbonate

EPA: 1.53 ft²

Weight: 11.7lbs

Mounting Accessories Sold Separately

Listing: cULus

Accessories (Sold Separately):

- Pole Arm Mount (80-300W) Bronze - For Round and Square Poles - CAT#: 74032A
- Slipfitter Mount (80-300W) Bronze - CAT#: 74034A
- Trunnion Mount (80-300W) Bronze - CAT#: 74038C
- Universal Mount (80-300W) Bronze - CAT#: 74043A
- Yoke Mount (150-200W) Bronze - CAT#: 74036C
- Microwave Motion Sensor (**120-277V and 480V Only**) - CAT#: 74072C
- Microwave Motion Sensor Remote (Optional, for use with 74072C) - CAT#: 74188B

Warranty:

Morris Products carries a 5 year warranty from date of purchase against defects in materials and workmanship (assuming normal and proper usage).