

KT-LED7.5MR16-NS-9XX /G2

75W REPLACEMENT LAMP

DESCRIPTION

7.5W MR16 Lamp | 2700–5000K | >90 CRI | Narrow Spot Light



LAMP TYPE: MR16

BASE TYPE: GU5.3

WATTAGE: 7.5W

COLOR TEMPERATURE: 2700–5000K

COLOR RENDERING INDEX (CRI): > 90

WARRANTY: 3 Years

RATED LIFE: L70 (25,000 Hours)



TYPICAL APPLICATIONS

- Track-lighting
- Display
- Under-cabinet
- Outdoor landscaping (with suitable protection from the elements)

PRODUCT FEATURES

- Energy efficient, 80%+ energy savings over legacy equivalents
- Lower heat generation than legacy equivalents
- Smooth, uniform dimming to 10%
- Precision-crafted, full-face optics for precise beam angle control
- Durable plastic housing lowers the risk of breakage
- HiCRI LEDs offer enhanced color rendering vs. 80 CRI LEDs, providing ideal clarity, representation, uniformity of illuminated area/objects
- Long life minimizes replacement and maintenance costs
- Compatible with Keystone low voltage transformers
- Suitable for damp locations
- Operating temperature range: –4°F/–20°C to 95°F/35°C
- PF: >0.9
- Rated for recessed and enclosed fixtures
- ANSI compliant construction ensures fitment for intended applications
- UL Listed
- Meets Energy Star requirements
- Complies with Part 15 of FCC
- Title 20 compliant

ELECTRICAL AND PERFORMANCE SPECIFICATIONS


Keystone Catalog Number	Description	Base Type	Rated Lamp Wattage	Legacy Equivalent	CCT	Lumens	Efficacy	Input Voltage	CRI	Beam Angle	Dimmable
KT-LED7.5MR16-NS-927 /G2	MR16 narrow spot light*	GU5.3	7.5W	75W halogen	2700K	570	76 lm/W	12V	>90	25°	Yes
KT-LED7.5MR16-NS-930 /G2	MR16 narrow spot light*	GU5.3	7.5W	75W halogen	3000K	570	76 lm/W	12V	>90	25°	Yes
KT-LED7.5MR16-NS-940 /G2	MR16 narrow spot light*	GU5.3	7.5W	75W halogen	4000K	570	76 lm/W	12V	>90	25°	Yes
KT-LED7.5MR16-NS-950 /G2	MR16 narrow spot light*	GU5.3	7.5W	75W halogen	5000K	570	76 lm/W	12V	>90	25°	Yes

* Requires 12V transformer

KT-LED7.5MR16-NS-9XX /G2

REPLACEMENT LAMP

PHYSICAL CHARACTERISTICS

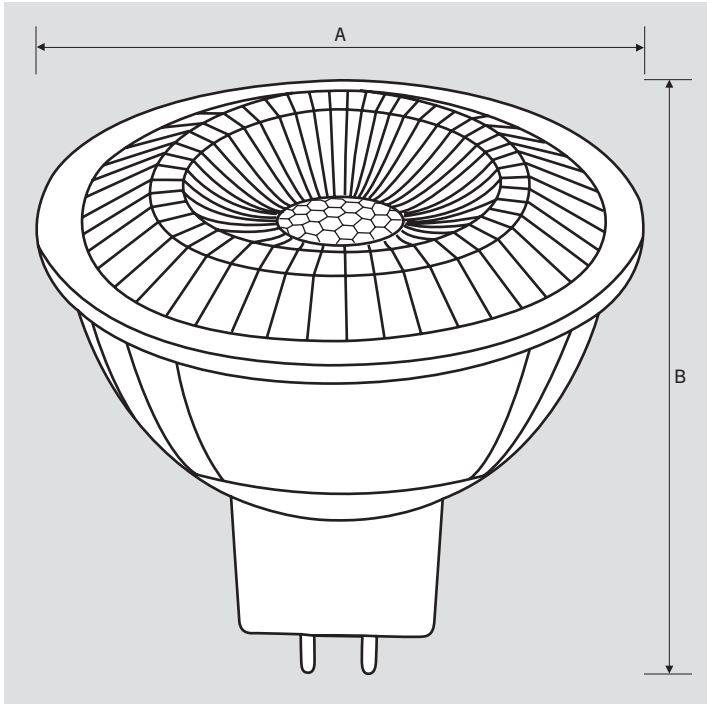

LAMP DIMENSIONS

A (Diameter)	1.97"
B (Length)	1.91"

BASE TYPE: GU5.3

RATED LIFE

L70 (Hours)	25,000
-------------	--------

PACKAGING

Carton Quantity	60 pcs
Carton Dimensions	12.95" × 10.91" × 6.54"
Carton Weight	9.5 lbs

ORDERING INFORMATION

ORDER CODE	CARTON QUANTITY	UPC	EASY CODE	ENERGY STAR UNIQUE ID
KT-LED7.5MR16-NS-927 /G2	60 pcs	843654141657	YDX-78	2400912
KT-LED7.5MR16-NS-930 /G2	60 pcs	843654141664	VFC-98	2400913
KT-LED7.5MR16-NS-940 /G2	60 pcs	843654141671	QGU-73	2400914
KT-LED7.5MR16-NS-950 /G2	60 pcs	843654141688	ATN-59	2400918

CATALOG NUMBER BREAKDOWN

KT-LED7.5MR16-NS-9XX /G2

1 2 3 4 5 6 7 8 9

- 1 Keystone Technologies
- 2 LED Lamp
- 3 Wattage
- 4 Multi-Faceted Reflector
- 5 Lamp Diameter (16/8")
- 6 Narrow Spot Light
- 7 90 CRI
- 8 CCT
- 9 Generation 2