



Gen 3 Bullet Floods

120-277V, 22W



Morris CAT#'s: 71660B, 71675B, 71677B, 71678B, 71679B, 71682B, 74660, 74664





Fig. 1



Fig. 2



Fig. 3

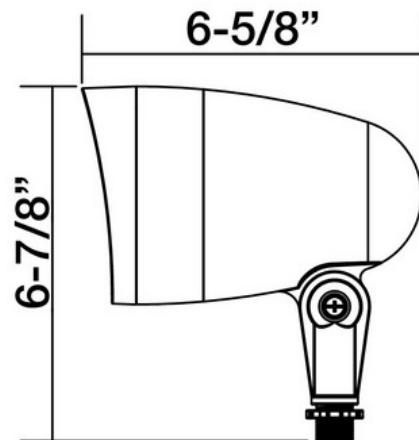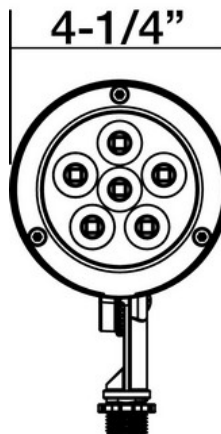


Features:

- Operation Temperature: -40°F - 104°F
- Corrosion Resistant Die Cast Aluminum Housing
- Tempered Glass Lens
- 1/2" NPT Knuckle
- 50,000+ Hour LED Life Expectancy
- IP65(Nema 4X) Dust & Water Tight
- Listings: cULus, DLC
- 5 Year Warranty


CAT. NO.	OLD CAT.	FIG.	WATTS	VOLTS	COLOR TEMP	COLOR	LUMENS	BEAM ANGLE	CRI	WEIGHT (LBS)	CASE QTY	EACH
FLOODS 22 WATT												
71660B		1	22W	120-277V	5000K COOL WHITE	BRONZE	2,873	19°	70	1.7	6	
71675B		1	22W	120-277V	3000K WARM WHITE	BRONZE	2,681	49°	70	1.7	6	
71677B		2	22W	120-277V	3000K WARM WHITE	BLACK	2,681	49°	70	1.7	6	
71678B		3	22W	120-277V	3000K WARM WHITE	WHITE	2,681	49°	70	1.7	6	
74660		1	22W	120-277V	4000K NEUTRAL WHITE	BRONZE	2,896	49°	70	1.7	6	
71679B	71679A	1	22W	120-277V	5000K COOL WHITE	BRONZE	2,894	49°	70	1.7	6	
71682B	71682A	3	22W	120-277V	5000K COOL WHITE	WHITE	2,894	49°	70	1.7	6	
74664		1	22W	120-277V	5000K COOL WHITE	BRONZE	2,802	78°	70	1.7	6	

PHOTOMETRY


19° Beam Angle

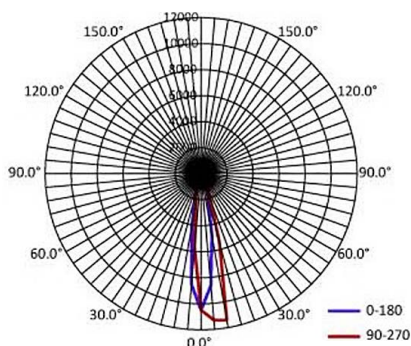

49° Beam Angle

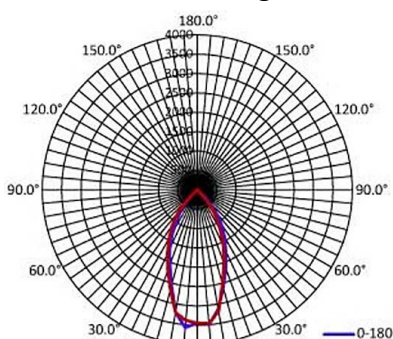

78° Beam Angle

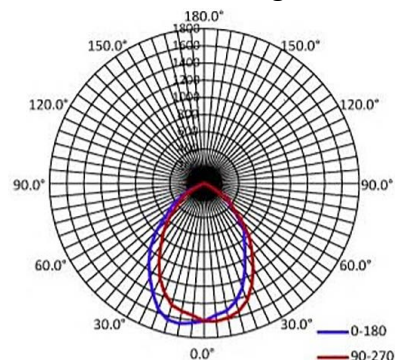



Gen 3 Bullet Floods

120-277V, 22W

Morris CAT#'s: 71660B, 71675B, 71677B,
71678B, 71679B, 71682B, 74660, 74664

Technical Specifications:

Electrical:

Input Voltage: 120-277V

Current: 0.18A @120V

Frequency: 60Hz

Power Factor: ≥ 0.99

THD: $\leq 20\%$

Product Parameters:

Wattage: 22W

Lumens: 2,681-2,973

Efficacy: 123 Lumens Per Watt

50,000+ Hour LED Life Span

CCT: 3000K / 4000K / 5000K

Chromaticity Measurements:

Beam Angle: 19° / 49° / 78°

R9: -29

CRI: 70

Component Specifications:

LED: Lumileds 2835

Driver: 120-277V 50-60HZ

Dimming: Yes

Operating Temperature:

Minimum Starting -40°F - 104°F

Construction:

Housing: Aluminum

Powder Coated

IP Rating: IP65

Lens Material: Tempered Glass

Mounting: 1/2" NPT Knuckle

Listings: cULus, DLC

Warranty:

Morris Products carries a 5 year warranty from date of purchase against defects in materials and workmanship (assuming normal and proper usage).