

LR30LN

PAR 30 | RETROFIT LAMP

PROJECT _____

TYPE _____

- / 120 V
- / 50,000 Hours (L70)
- / Halogen PAR form factor (ANSI compliant)
- / Lightest LED lamps on the market
- / RoHS-compliant
- / Dry location rating
- / ETL Certified to UL Standard 1993
- / Contain no lead or mercury
- / Fully dimmable; Compatibility list available.
- / Base Types: E26 Standard; GU24*
- / Recommended for use in open environment fixtures
- / Approved for use in recessed IC and non-IC rated fixtures with open apertures only
- / VioLight color rendering enhancements available
- / *90+ High CRI available for 27K and 30K. Consult factory for availability in other color temperatures. To order, replace 'K' in CCT designation with 'h' in code below.



Ordering Information


Example: LR30LN/15/30K/1450/WH

Lamp	Beam Spread	CCT	Lumens	Housing Color
LR30LN	15	27K	1950	WH - White
	25	30K	2050	SV - Silver*
	40	35K*	2050	BK - Black*
		40K*	2050	
		27K	1450	
		30K	1450	
		30v	1450	
		35K*	1450	
		40K*	1450	

Product Code				Power (Watts)	CBCP (cd)	Standard CRI
Lamp	Beam Angle	CCT	Delivered Lumens			
LR30LN	15	27K	1950	24	15975	83
	25				9950	
	40				3900	
	15	30K	2050	20	16775	85
	25				10450	
	40				4100	
	15	27K	1450	19	11875	83
	25				7400	
	40				2900	
	15	30K		18	11875	83
	25				7380	
	40				2900	



Weight: 7.3 oz.

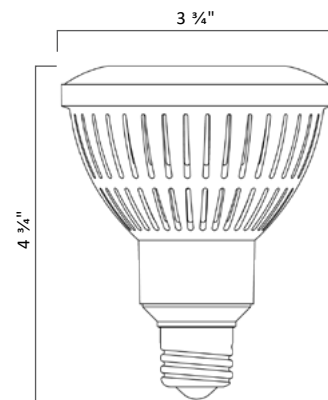

*Consult factory for lead time and availability

Note: VioLight and High CRI products will produce up to 20% less measured lumens than their standard CCT equivalent; Although, perceived lumens will be noticeably higher than their standard counterparts.



Warranty



IES Files



Dimmers



THEROTTLE

Thermal Throttle – In the event that Solais products begin to overheat, they will undetectably dim themselves to protect your technology investments.



VIOLIGHT™

VioLight radiates superior quality, enhancing colors in merchandise, making colors more vibrant and offering a truly competitive LED replacement for CMH-like crispness.

WARNING: Not for use in fully enclosed luminaires. Risk of electric shock. Use in an indoor, dry location only. This device is not intended for use with emergency exit fixtures or emergency exit lights. May not be compatible with all dimmers; please visit solais.com/dimming for up-to-date dimmer compatibility information.

NOTES: This device complies with Part 15 of the FCC Rule. This product may cause interference with other devices. If interference occurs, change the locations of the products involved. **Compatible on 120v systems.**