

## LED Luminaires

### Sektor Dusk to Dawn (Outdoor Fixture)

- DLC 5.1 Premium
- 3PR Photocell and Shorting Cap Included
- Tool-less Entry
- Compact and Lightweight Design for Easy Installation
- Wattage Selectable
- CCT Selectable

### Specifications



### Description

The Sektor Dusk to Dawn light provides a compact, lightweight, robust, and easy to install option for many different general outdoor lighting applications including walkways, parking areas, roadway, and landscape lighting. The Sektor Dusk to Dawn light comes standard with a NEMA 3-pin photocell which automatically turns the luminaire off during daylight hours to save on energy cost and then on again during nighttime hours to provide the needed light. The Dusk to Dawn fixture also includes a shorting cap when the photocell is not needed.

### Performance

- 3640 - 8700 lumen output
- L70: 50,000 hour rated life
- 0-10V dimmable
- >130 lm/W efficacy
- 120-277VAC
- >80 CRI

### Certifications

- DLC 5.1 premium
- IP65 rated
- UL certified
- RoHS certified
- FCC approved

### Construction

- UV resistant polycarbonate lens
- Robust gray die-cast aluminum housing
- Dusk to Dawn 3-pin receptacle

### Applications

- Walkways
- Parking areas
- Roadway
- Landscape lighting

# Sektor Dusk to Dawn (Outdoor Fixture)

## Product Description

Ordering Logic: Ex: SDD-40-CCT-U-GR

Series	Wattage	CCT	U	GR	3PR
SDD = SekTor Dusk to Dawn	40 = 40 Watts WS = Wattage Selectable (28W-40W-60W)	CS = 5000K CS = CCT Selectable 3000K-4000K-5000K	Universal Voltage, 120-277VAC	GR = Grey Finish	3PR Photo Receptacle

<sup>1</sup>Lead times apply for non-stock configurations

## Ordering Information

Stock SKU's		
Product SKU	Product Code	Product Description
24846	SDD-40-50-U-GR-3PR	SekTor Dusk to Dawn 40 Watt 5000K 120-277VAC Gray 3 Pin Receptacle with shorting cap
24845	SDD-WS-CS-U-GR-3PR	SekTor Dusk to Dawn Wattage Selectable 60W-40W-28W CCT Selectable 3000K 4000K 5000K 120-277VAC Gray 3 Pin Receptacle with shorting cap
Accessories		
24910	SEK-SPD	SekTor 10 KVA Surge Protection Device
10261	SDD-90	Sektor Dusk To Dawn 90 Degree Mounting Arm

## Performance Table

Product Code	Wattage	3000K		4000K		5000K	
		Lumen Output (lm)	Efficacy (lm/W)	Lumen Output (lm)	Efficacy (lm/W)	Lumen Output (lm)	Efficacy (lm/W)
SDD-40-50-U-GR-3PR	40					5400	135
SDD-WS-CS-U-GR-3PR	28	3640	130	4060	145	3780	135
	40	5200		5800		5400	
	60	7800		8700		8100	


## Sektor Dusk to Dawn (Outdoor Fixture)

### Specifications Table

	SDD-40-50-U-GR-3PR	SDD-WS-CS-U-GR-3PR
<b>Wattage</b>	40W	28W-40W-60W
<b>Lumens</b>	5,400 Lumens	3,640-8,700 Lumens
<b>CCT</b>	5000K	3000K-4000K-5000K
<b>BUG Rating</b>	B2 - U3 - G2	
<b>Distribution</b>	Type 5	
<b>Efficacy</b>	> 130 LPW	
<b>CRI</b>	>80	
<b>L70 Lifetime (Hrs)</b>	50,000	
<b>Voltage</b>	120-277VAC	
<b>Dimming</b>	Yes (0-10V)	
<b>Housing</b>	Die-Cast Aluminum	
<b>Lens</b>	Polycarbonate	
<b>Operating Temperature</b>	-40°C to 50°C	
<b>Listings</b>	DLC 5.1 Premium, IP65, UL, RoHS	
<b>Environment</b>	Wet Location	
<b>Weight</b>	4.35 lbs	
<b>Warranty</b>	5 Years Standard	

### Dimensions

#### Sektor Dusk to Dawn Dimensions

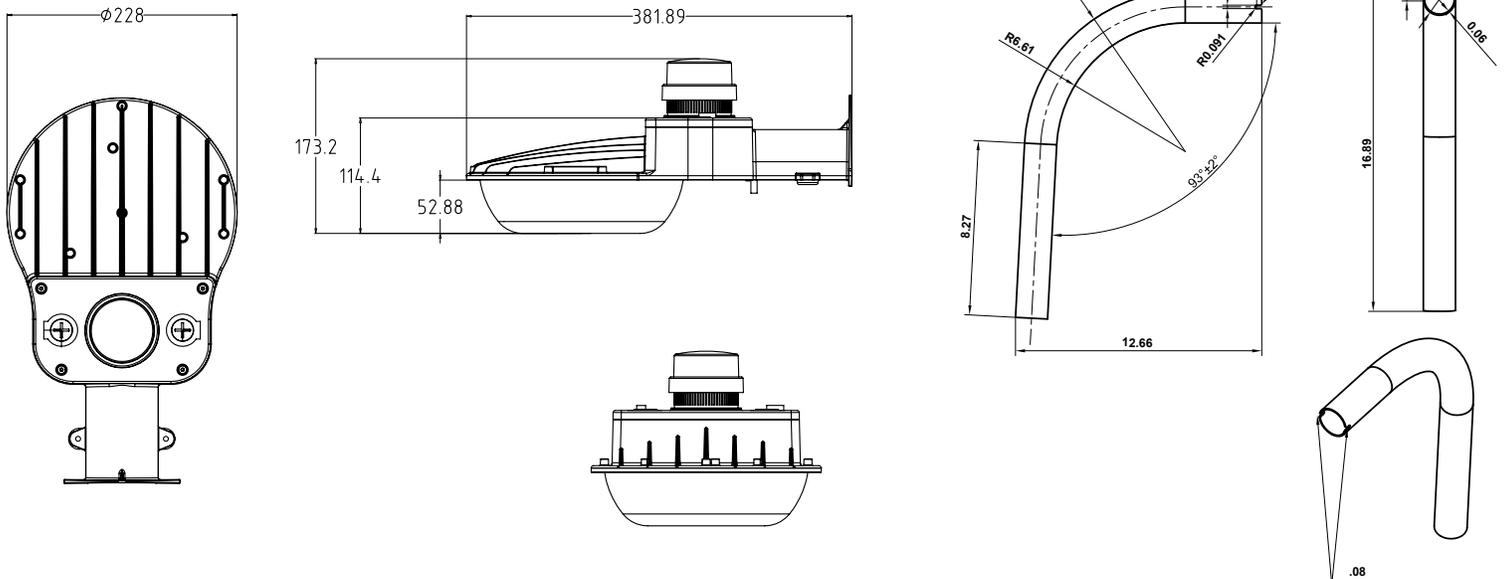

## Sektor Dusk to Dawn (Outdoor Fixture) Photometrics\*

\*For complete photometry/IES files, please contact the factory.

