



# T8 LED FREEZER/CABINET LAMPS

## T8 LED LAMP

### DESCRIPTION

18W, 22W, 26W | 4ft, 5ft, 6ft | 4000K, 5000K | >80CRI | 120VAC



<b>LAMP TYPE:</b> Linear	<b>COLOR TEMPERATURE:</b> 4000K, 5000K
<b>BULB TYPE:</b> T8 LED	<b>COLOR RENDERING INDEX (CRI):</b> >80
<b>LAMP LENGTH:</b> 4ft, 5ft, and 6ft.	<b>WARRANTY:</b> 5 Years
<b>WATTAGE:</b> 18W, 22W, 26W	



### PRODUCT FEATURES


- Uniquely Made for Freezer/Cabinet/Display Applications
- Plugs Directly into AC Outlet
- UL Listed
- 50,000+ Hour Lifetime
- Environmentally Friendly: No Mercury Used
- Instant Startup
- Nanoplastic Lens for Optimal Strength and Minimal Weight
- Includes Mounting Brackets and 72" Power Cord, 2-Prong US Plug
- Operating Temperature: -30°C/-22°F to 40°C/104°F
- 120+ Lumens Per Watt (Bare Lamp Efficacy)
- Suitable for Damp Locations
- IP65 Rated

### OPERATING SPECIFICATIONS

Catalog Number <sup>1</sup>	Length	Input Voltage	Wattage	CRI	Total Lumens	Efficacy	Power Factor
KT-FTLED18T8-48P-8xx	4ft	120VAC	18W	>80	2250	125lm/W	>0.9
KT-FTLED22T8-60P-8xx	5ft	120VAC	22W	>80	2750	125lm/W	>0.9
KT-FTLED26T8-72P-8xx	6ft	120VAC	26W	>80	3250	125lm/W	>0.9

<sup>1</sup> "xx" Designates Color Temperature; Available in 4000K and 5000K.

### DIMENSIONS

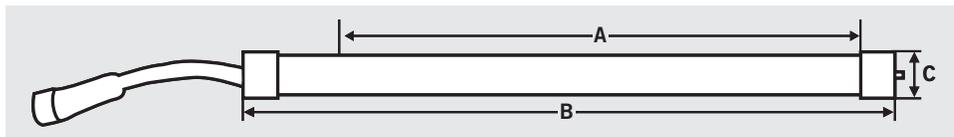

#### KT-FTLED18T8-48P-8XX

<b>A (Illuminated Length)</b>	43.25"
<b>B (Body Length)</b>	47.38"
<b>C (Diameter)*</b>	1.13"

#### KT-FTLED22T8-60P-8XX

<b>A (Illuminated Length)</b>	55.25"
<b>B (Body Length)</b>	59.38"
<b>C (Diameter)*</b>	1.13"

#### KT-FTLED26T8-72P-8XX

<b>A (Illuminated Length)</b>	67.25"
<b>B (Body Length)</b>	71.38"
<b>C (Diameter)*</b>	1.13"



# T8 LED FREEZER/CABINET LAMPS


## T8 LED LAMP

### ACCESSORIES


Catalog Number	Description
KT-WH-FT-36	36" Extension Cord, IP65
KT-WH-FT-YS	Y-Splitter Cord, IP65

Accessories Sold Separately.

#### DOUBLE LIGHT CONNECTION:

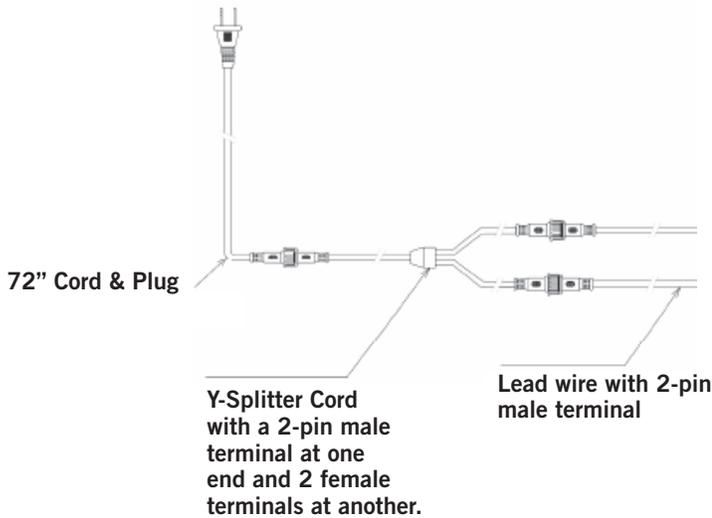

#### CONNECTION:

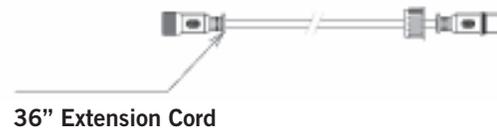

### CATALOG NUMBER BREAKDOWN

# KT-FTLEDXXT8-48P-8XX

