





includes →
support
feet to
prevent
socket sag

- 320W models replacing 1000W HID.
- LED panel is adhered on lens within fixture.
- Lens must be flat and made of glass.
- Includes a fan and thermal sensor to run cool and ensure a long and bright life.
- Enclosed fixture required.
- Type V optic.
- Available in 4000 and 5000K.
- 3000K special order - MOQ of 100 pieces.
- LED-8091: 120-277V
(can be used on 208V & 240V).
- LED-8091-HV: 277-480V
(can be used on 347V).
- "D" Models dim to 50% by selecting "LO" on the switch located on the top of the lamp only
- Recommended for shoebox fixtures with horizontal sockets. Not recommended for high bay, sports lighters, or other fixtures with vertical sockets.



PART #	UPC	REPLACES	WATTAGE	LUMENS	COLOR	BASE
LED-8091M50D	844006077587	up to 1000W HID	320W	44610	5000K	EX39
LED-8091M50D-HV	844006077594	up to 1000W HID	320W	44610	5000K	EX39



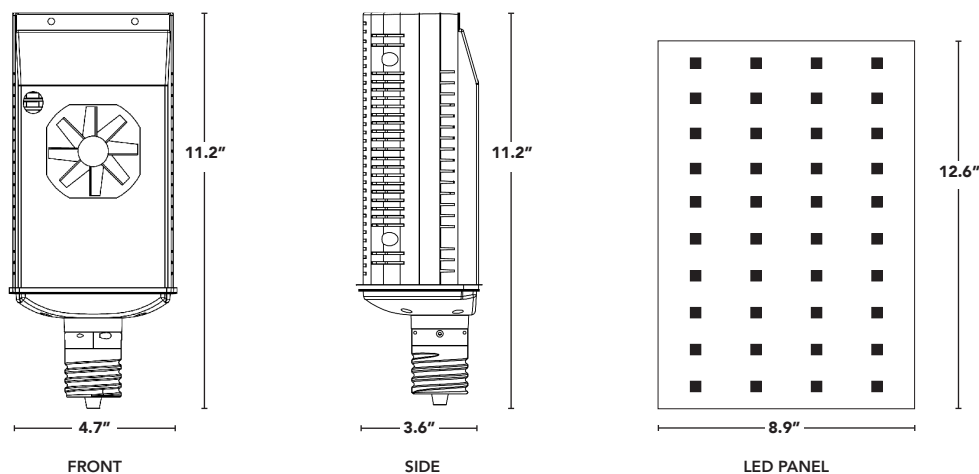

PART #	UPC	REPLACES	WATTAGE	LUMENS	COLOR	BASE	DLC CODE
LED-8091M30D*	844006077556	up to 1000W HID	320W	43090	3000K*	EX39	S-IHEWFN
LED-8091M40D	844006077563	up to 1000W HID	320W	43380	4000K	EX39	S-38E4T9
LED-8091M50D	844006077587	up to 1000W HID	320W	44610	5000K	EX39	S-I0TZBH
LED-8091M40D-HV	844006077570	up to 1000W HID	320W	43380	4000K	EX39	S-24I3PX
LED-8091M50D-HV	844006077594	up to 1000W HID	320W	44610	5000K	EX39	S-BL4W5K

* 3000K special order only - MOQ of 100 pieces