



71423C - 11" MINI WALLPACK

13W/20W/26W 3K/4K/5K 120-277V BRONZE




FEATURES:

- Color Selectable: 3000K/4000K/5000K
- Wattage Selectable: 13W/20W/26W
- Photocell included with on/off switch
- Bronze powder coat finish
- 0-10V Dimmable
- cULus Listed
- IP65 Wet Location Rated
- Two Installation Methods:
 - Mounting with a junction box
 - Mounting with a 1/2" conduit at the bottom
- 11" x 6.8" footprint for easy replacement of traditional luminaire


CAT NO.	HOUSING COLOR	WATTAGE	CCT	LUMENS	VOLTAGE	LUMENS PER WATT	CRI	DIMMING
71423C	BRONZE	13/20/26W	3K/4K/5K	4,150	120-277V	163 LM/W	>70	0-10V

PHOTOMETRY:

CIE 1931 x y Chromaticity Diagram

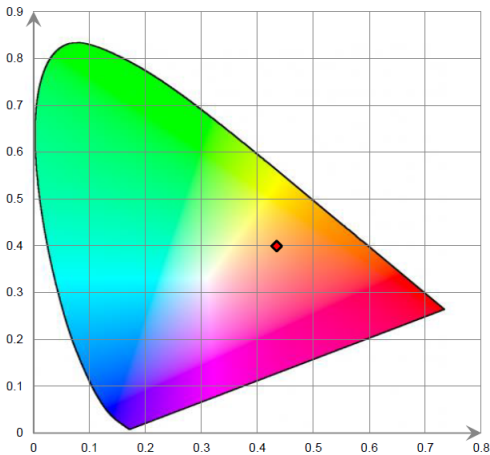

LUMINOUS INTENSITY DISTRIBUTION

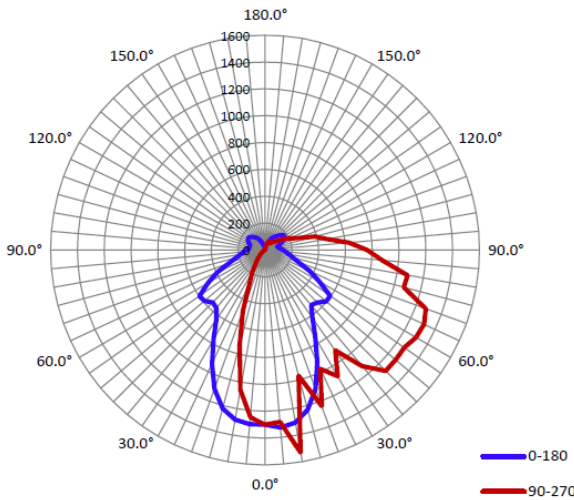



71423C - 11" MINI WALLPACK

13W/20W/26W 3K/4K/5K 120-277V BRONZE

TECHNICAL SPECIFICATIONS:

ELECTRICAL:

Input Voltage: 120-277V
Current: 0.23A @120V
Frequency: 50/60Hz
Power Factor: ≥ 0.9
THD: $\leq 20\%$

PRODUCT PARAMETERS:

Watts: 13W/20W/26W
Lumens: 4150
Efficacy: 163 lm/w
50,000+ Hour LED Life Expectancy
CCT: 3000K/4000K/5000K

CHROMACITY:

CRI: >70
R9: -35

COMPONENT SPECIFICATIONS:

Driver: 120-277V
4kV Surge Protection

OPERATING TEMPERATURE: $-40^{\circ}\text{F} - 104^{\circ}\text{F}$

CONSTRUCTION:

Housing: Die Cast Aluminum Backplate, PC Housing,
Bronze Powder Coat Finish.
Lens: Frosted Polycarbonate
IP Rating: IP65, suitable for Wet Locations
Mounting: Junction Box or 1/2" conduit at bottom

LISTINGS:

cULus

DLC Premium: S-FMKPOP


WARRANTY:

Morris Products carries a 5 year warranty from date of purchase against defects in materials and workmanship (assuming normal and proper usage).

LUMEN BREAKDOWN:

	3000K	4000K	5000K
13W	2,068	2,136	2,132
20W	2,986	3,107	3,074
26W	3,919	4,150	4,054

PRODUCT DIMENSIONS:

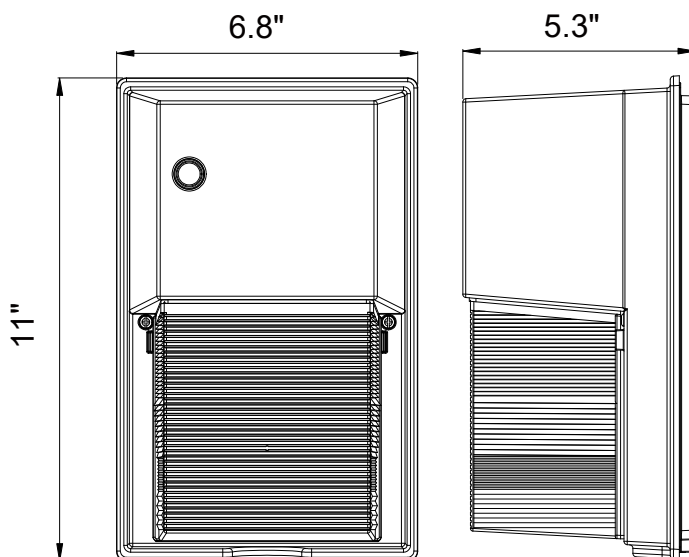

REMOVE BACK FOR ACCESS TO:

- CCT Select
- Wattage Select
- Photocell On/Off

