




MORRIS CAT#: 71475C

LED CCT & Wattage Tunable Wall Pack

36W/45W/60W, 120-277V, 3K-5K

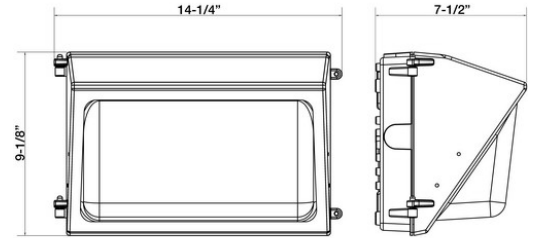

Features:

- Use in general lighting applications: Parking Lots & Building Security
- Wattage and Color Tunable
- Lumiled LUXEON 3030 LEDs
- Die Cast Aluminum Housing
- Polyester Powder Coat Finish in Bronze
- 4 Threaded K/Os -(1)Top, (1)Back, (2)Sides
- Photocontrol (not included) can be installed on fixture

Color and Wattage Tunable

4KV surge protector inside of power supply

5 Year Limited Warranty


IP65 rated

Certification: ETL/cETL, DLC

Environment: Suitable for Wet Locations

Part#	CCT	Lumens	Voltage	Wattage	Light Pattern	Dimming	Lumens/Watt
71475C	3000K	7,960@60W	120/208/ 240/277V	36W	120°	0-10/PWM	133lm/w
	4000K	8,481@60W		45W			141lm/w
	5000K	8,401@60W		60W			140lm/w



PHOTOMETRY

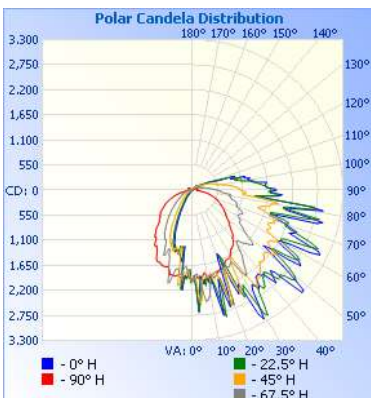

Illuminance at a Distance

Center Beam fc	Beam Width
4.0ft	124.2 fc 5.0 ft 7.8 ft
8.0ft	31.1 fc 9.9 ft 15.6 ft
12.0ft	13.8 fc 14.9 ft 23.5 ft
16.0ft	7.8 fc 19.9 ft 31.3 ft
20.0ft	5.0 fc 24.8 ft 39.1 ft

■ Vert. Spread: 63.7°
■ Horiz. Spread: 88.7°

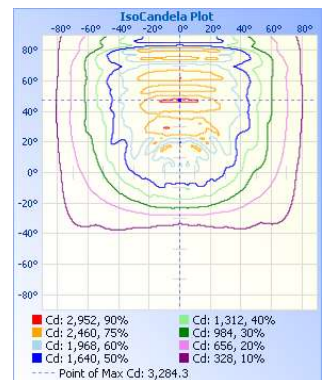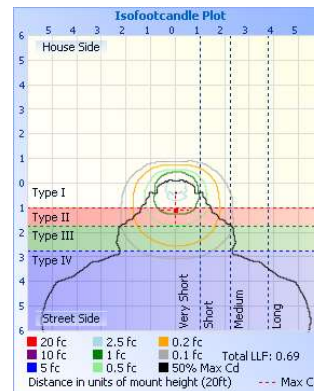



MORRIS CAT#: 71475C

LED CCT & Wattage Tunable Wall Packs

36W/45W/60W, 120-277V, 3K-5K

Technical Specifications:

Electrical:

Input Voltage: 120/208/240/277V

Current: .52A@120V

Frequency: 50/60Hz

Power Factor: $\geq .9$

THD: >20%

Product Parameters:

Input Watts: 36W, 45W, 60W

Lumens: 7,960-8,481

Efficacy: 132-141 lumens per watt

50,000+ Hour L70 Life Span

CCT: 3000K-5000K (Cool White)

Chromaticity Measurements:

Beam Angle: 365° H X 256° V

BUG Rating: B2-U4-G5

CRI: 72

R9: -32

Component Specifications:

LED: Lumileds 3030

120-277V, 50-60Hz

Driver Output Volts: 90-120V

Driver Output Amps: 1800mA

4KV Surge Protection

Dimming: 0-10V

Operating Temperature:

Minimum Starting: -4°F to 104°F

Construction:

Housing: Aluminum Alloy

Powder Coated

IP Rating: IP65 suitable for wet locations

Lens Material: Heat Resistant Polycarbonate

Lens UV Resistant, Fire Resistant

Mounting: Hinged Spider Plate

Listings: ETL

Warranty:

Morris Products carries a 5 year warranty from date of purchase against defects in materials and workmanship (assuming normal and proper usage).