



Gen 3 Bullet Floods

120-277V, 40W



Morris CAT#'s: 71663B, 71691B, 71693B,
71694B, 71695B, 71697B, 71698B 74662, 74666





Fig. 1



Fig. 2



Fig. 3




Features:

- Operation Temperature: -40°F - 104°F
- Corrosion Resistant Die Cast Aluminum Housing
- Tempered Glass Lens
- 1/2" NPT Knuckle
- 50,000+ Hour LED Life Expectancy
- IP65(Nema 4X) Dust & Water Tight
- Listings: cULus, DLC
- 5 Year Warranty


CAT. NO.	OLD CAT.	FIG.	WATTS	VOLTS	COLOR TEMP	COLOR	LUMENS	BEAM ANGLE	CRI	WEIGHT (LBS)	CASE QTY	EACH
71663B	71391A	1	40W	120-277V	5000K COOL WHITE	BRONZE	5,347	19°	71	2.6	6	
71691B		1	40W	120-277V	3000K WARM WHITE	BRONZE	4,861	45°	70	2.6	6	
71694B		1	40W	120-277V	3000K WARM WHITE	WHITE	4,861	45°	70	2.6	6	
71693B		1	40W	120-277V	3000K WARM WHITE	BLACK	4,861	45°	70	2.6	6	
74662		1	40W	120-277V	4000K NEUTRAL WHITE	BRONZE	5,341	45°	70	2.6	6	
71695B		1	40W	120-277V	5000K COOL WHITE	BRONZE	5,432	45°	71	2.6	6	
71698B		1	40W	120-277V	5000K COOL WHITE	WHITE	5,432	45°	71	2.6	6	
71697B		1	40W	120-277V	5000K COOL WHITE	BLACK	5,432	45°	71	2.6	6	
74666		1	40W	120-277V	5000K COOL WHITE	BRONZE	5,190	78°	71	2.6	6	

PHOTOMETRY


19° Beam Angle

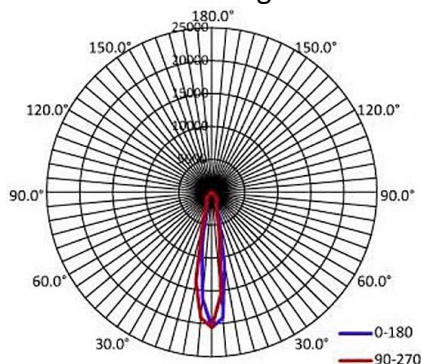

45° Beam Angle

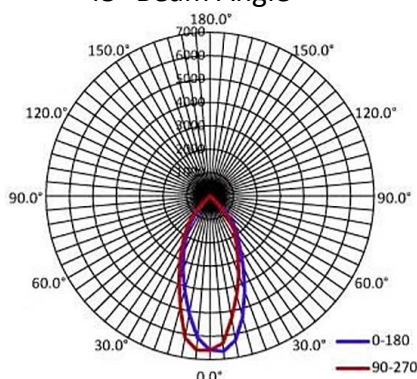

78° Beam Angle

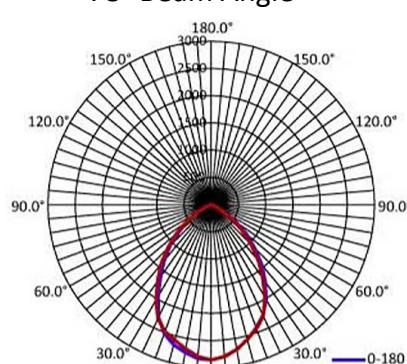



Gen 3 Bullet Floods

120-277V, 40W

Morris CAT#'s: 71663B, 71691B, 71693B,
71694B, 71695B, 71697B, 71698B 74662, 74666

Technical Specifications:

Electrical:

Input Voltage: 120-277V

Current: 0.33A @120V

Frequency: 60Hz

Power Factor: ≥ 0.99

THD: $\leq 20\%$

Product Parameters:

Wattage: 40W

Lumens: 4,861-5,432

Efficacy: 121 Lumens Per Watt

50,000+ Hour LED Life Span

CCT: 3000K / 4000K / 5000K

Chromaticity Measurements:

Beam Angle: 19° / 45° / 78°

R9: -29

CRI: 70/71

Component Specifications:

LED: Lumileds 2835

Driver: 120-277V 50-60HZ

Dimming: Yes

Operating Temperature:

Minimum Starting -40°F - 104°F

Construction:

Housing: Aluminum

Powder Coated

IP Rating: IP65

Lens Material: Tempered Glass

Mounting: 1/2" NPT Knuckle

Listings: cULus, DLC

Warranty:

Morris Products carries a 5 year warranty from date of purchase against defects in materials and workmanship (assuming normal and proper usage).