



# PAR30/PAR20 LED

## 9.4PAR30S/COR/930/F40/DIM/120V T20 6/1FB

Philips PAR30 and PAR20 LED Single Optic Lamps provide superior lighting aesthetics and optimal thermal efficiency in a sleek, lightweight design.

### Warnings and Safety

- Suitable for use in damp locations.
- Not for use in totally enclosed luminaires.
- Before replacing, turn off power and let lamp cool to avoid electrical shock or burn.
- CAUTION: Risk of electric shock— do not use where directly exposed to water
- NOTES: This device complies with Part 18 of the FCC rule. This product may cause interference with other devices. If interference occurs, change the location of the products involved. This RFLD device complies with Canadian ICES-005.

### Product data

General Information	
Base	E26 [ Single Contact Medium Screw]
EU RoHS compliant	Yes
Nominal Lifetime (Nom)	25000 h
Switching Cycle	50000X
Technical Type	9.4-75W
Light Technical	
Color Code	930 [ CCT of 3000K]
Beam Angle (Nom)	40 °
Initial lumen (Nom)	850 lm
Luminous Intensity (Nom)	1315 cd
Color Designation	White (WH)
Correlated Color Temperature (Nom)	3000 K
Luminous Efficacy (rated) (Nom)	90.00 lm/W
Color Consistency	<4
Color Rendering Index (Nom)	90


LLMF At End Of Nominal Lifetime (Nom) 70 %	
Operating and Electrical	
Input Frequency	50 to 60 Hz
Power (Rated) (Nom)	9.4 W
Lamp Current (Nom)	90 mA
Wattage Equivalent	75 W
Starting Time (Nom)	0.5 s
Warm Up Time to 60% Light (Nom)	0.5 s
Power Factor (Nom)	0.9
Voltage (Nom)	120 V
Temperature	
T-Case Maximum (Nom)	80 °C

PAR30/PAR20 LED

Controls and Dimming	
Dimmable	Yes
Approval and Application	
Energy Efficiency Label (EEL)	Not applicable
Suitable For Accent Lighting	Yes
Energy Consumption kWh/1000 h	- kWh
Product Data	
Order product name	9.4PAR30S/COR/930/F40/DIM/120V T20 6/1FB

EAN/UPC - Product	046677546991
Order code	546993
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	6
Material Nr. (12NC)	929002045704
Net Weight (Piece)	0.134 kg


Dimensional drawing




JA8 PAR30s 9.4-75W 850lm 40D 3000K E26 D

Product	D	C
9.4PAR30S/COR/930/F40/DIM/120V T20 6/1FB	97 mm	94 mm

Photometric data

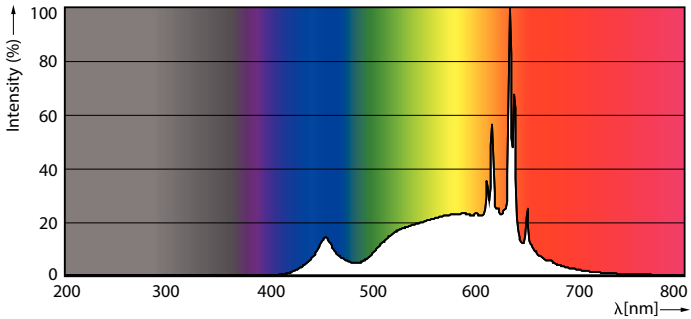


LEDspots 9,4W PAR30S E26 930 40D



LEDspots 9,4W PAR30S E26 930 40D


PAR30/PAR20 LED

Photometric data




LEDspots 9,4W PAR30S E26 930 40D

Lifetime

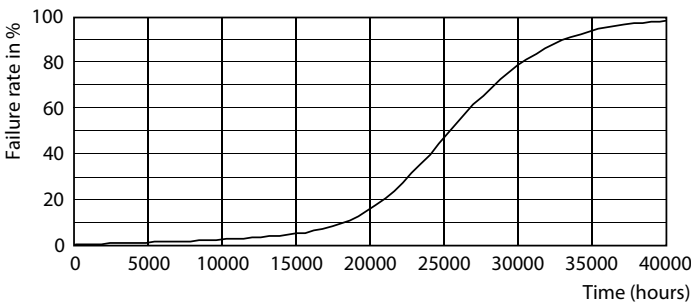

LEDspots LED 25K

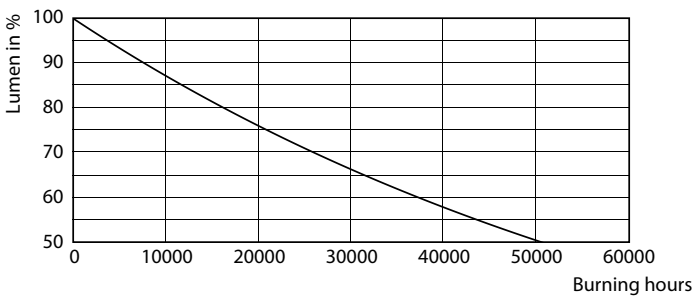

LEDspots LMP 25K

