

LED Designer Deco

3.5T10/VIN/820/E26/Amber/G/SP D 4/1PFT20


Philips LED Designer Deco lamps allow you to maintain a warm, classic light or a modern, chic effect while providing longer life and energy savings

Product data

General information	
Base	E26 [Single Contact Medium Screw]
EU RoHS compliant	Yes
Nominal Lifetime (Nom)	15000 h
Switching Cycle	20000
Light technical	
Color Code	820 [CCT of 2000K]
Beam Angle (Nom)	330 °
Initial lumen (Nom)	225 lm
Color Designation	Flame
Correlated Color Temperature (Nom)	2000 K
Luminous Efficacy (rated) (Nom)	64 lm/W
Color Consistency	<6
Color Rendering Index (Nom)	80
LLMF At End Of Nominal Lifetime (Nom)	70 %
Operating and electrical	
Input Frequency	60 Hz
Power (Rated) (Nom)	3.5 W
Lamp Current (Nom)	41 mA
Wattage Equivalent	25 W
Starting Time (Nom)	0.5 s
Warm Up Time to 60% Light (Nom)	0.5 s
UL Type	Yes

Power Factor (Nom)	0.7
Voltage (Nom)	120 V
Temperature	
T-Ambient (Max)	113 °F
T-Ambient (Min)	-4 °F
Controls and dimming	
Dimmable	Only with specific dimmers
Mechanical and housing	
Bulb Finish	Amber
Bulb Material	Glass
Bulb Shape	T10 [T10]
Product data	
Order product name	3.5T10/VIN/820/E26/Amber/G/SP D 4/1PFT20
EAN/UPC - Product	046677565671
Order code	565671
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	4
Material Nr. (12NC)	929002987403
Net Weight (Piece)	0.06 lb


Dimensional drawing




3.5T10/VIN/820/E26/Amber/G/SP D 4/1PFT20

Product	D	C
3.5T10/VIN/820/E26/Amber/G/SP D 4/1PFT20	1-1/4 in	4-1/16 in


Photometric data



General Uniform Lighting



Light Distribution Diagram

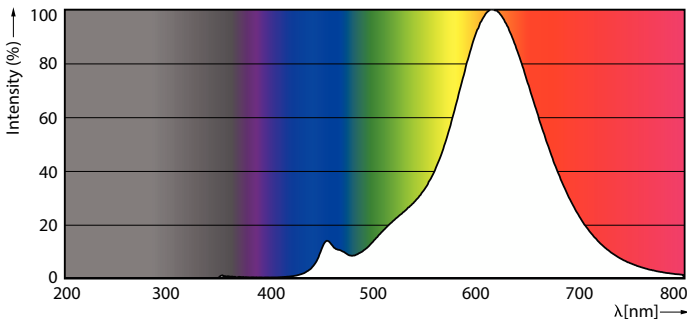

Spectral Power Distribution Colour

Lifetime



Life Expectancy Diagram



Lumen Maintenance Diagram

