



# BR/R LED

## 9.5W SlimStyle BR30 CRI90 DIM 2700K E26

Philips BR Dimmable LED Lamps with AirFlux technology provide a soft, diffused level of light and smooth dimming to reduce glare. The sleek, lightweight design is ideal for downlighting.

### Product data


General Information	
Cap-Base	E26 [ Single Contact Medium Screw]
Nominal Lifetime (Nom)	25000 h
Switching Cycle	50000X
Technical Type	9.5-65W
Light Technical	
Color Code	927
Luminous Flux (Nom)	650 lm
Luminous Flux (Rated) (Nom)	650 lm
Color Designation	Soft White
Correlated Color Temperature (Nom)	2700 K
Luminous Efficacy (rated) (Nom)	68.4 lm/W
Color Consistency	<6
Color Rendering Index (Nom)	90
LLMF At End Of Nominal Lifetime (Nom)	70 %
Operating and Electrical	
Input Frequency	60 Hz
Power (Rated) (Nom)	9.5 W
Lamp Current (Nom)	95 mA
Wattage Equivalent	65 W
Starting Time (Nom)	0.5 s

Warm Up Time To 60% Light (Nom)	0.5 s
Power Factor (Nom)	0.9
Voltage (Nom)	120 V
Temperature	
T-Case Maximum (Nom)	92 °C
Controls and Dimming	
Dimmable	Yes
Mechanical and Housing	
Bulb Finish	Frosted
Approval and Application	
Suitable For Accent Lighting	Yes
Energy Consumption kWh/1000 h	9.50 kWh
Product Data	
Order product name	9.5W SlimStyle BR30 CRI90 DIM 2700K E26
EAN/UPC - Product	046677455446
Order code	929001133503
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	4

BR/R LED

Material Nr. (12NC)	929001133503
Net Weight (Piece)	0.001 kg




Dimensional drawing



BR30 120V 9.5W-65W 110D 2700K E26 Dim

Product	D	C
9.5W SlimStyle BR30 CRI90 DIM 2700K E26	95.3 mm	131 mm

Photometric data

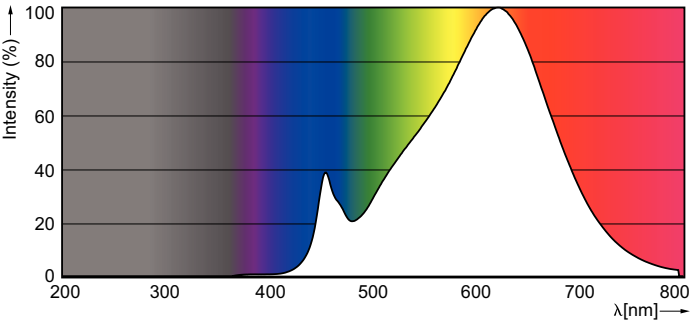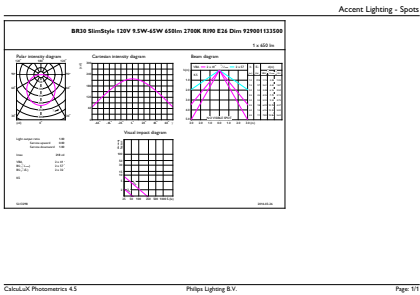

BR/R LED

