


| : 773-332

Mounting carrier; 773 Series - 2.5 mm² / 4 mm² / 6 mm²; for DIN-35 rail mounting/
screw mounting; orange

<https://www.wago.com/773-332>

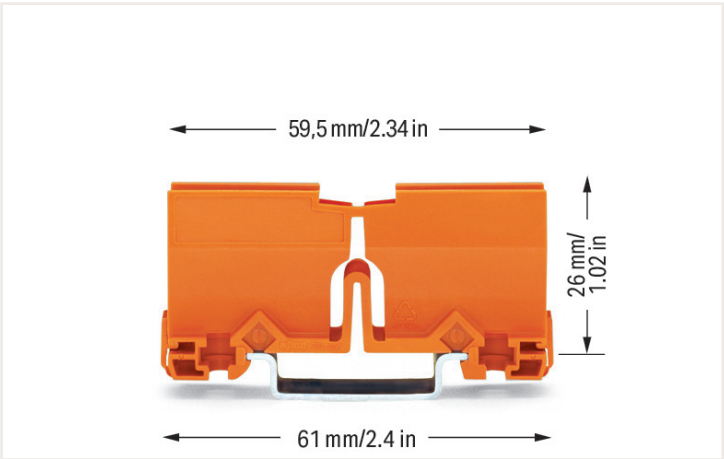

:  orange



Physical data	
Width	18 mm / 0.709 inches
Height	61 mm / 2.402 inches
Depth from upper-edge of DIN-rail	26 mm / 1.024 inches


Mechanical data	
Mounting type	DIN-35 rail Screw mount
Suitable	for all PUSH WIRE® junction box connectors (773 Series)

Material data	
Note (material data)	Information on material data can be found here
Color	orange
Fire load	0.255 MJ
Weight	8.5 g


Commercial data	
Product Group	7 (Push Wire Conn.)
eCl@ss 10.0	27-14-11-92
eCl@ss 9.0	27-14-11-92
ETIM 8.0	EC002848
ETIM 7.0	EC002848
PU (SPU)	50 (10) Stück
Packaging type	Box
Country of origin VKOrg Germany	DE
GTIN	4044918526524
Customs tariff number VKOrg Germany	39269097900

Installation notes


Installation



Snap the mounting carrier onto the DIN-rail.




Use the cover as an end plate.



Remove the mounting carrier from the DIN-rail.

Application



A mounting carrier (see accessories) suits applications where the connectors must be marked and secured in position. The DIN-35 rail-mount carrier fits up to two connectors and can also be mounted on a flat surface using two screws.

Using this connector carrier, a large range of wiring applications can be achieved in distribution or junction boxes. To mention just a few: potential multiplication and changing from or to 6 mm² (10 AWG) conductor size.