

Specification Sheet



Saf-T-Brace®

For Retrofit or New Construction Applications
No Attic Access Required

Item Number 01100

Specifications

- Teeth twist and lock into joist to create more secure connection
- Fits 16" to 24" ceiling joists
- Fits all ceiling fans
- Installs without attic access in four easy steps
- Ideal for retrofit applications
- For fixture support of 150 lbs. or less on 16" centers
- For fixture support of 50 lbs. or less on 24" centers
- Acceptable for fan support of 70 lbs. or less
- Heavy duty, 15.5 cubic inch dual mount* electrical box
- Box depth - 1½"
- 6 - ½" Romex or conduit knockouts
- Position box anywhere along brace
- Includes plastic Romex connector

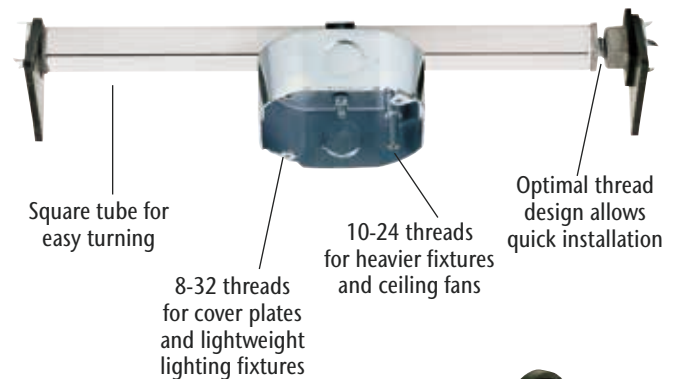


Pack Information

- Individually Packaged
- 24 Per Cut Case

Patented Design Provides Fast, Fingertip Expansion and Positive Attachment to Joists


Step 1

Easy installation from below ceiling through any 4" diameter hole.




Step 2

Rotate bar until teeth are fully embedded into joist.



Step 3

Attach electrical box and install fan or lighting fixture per manufacturer's instructions.



Includes Mounting Hardware And Instructions.
Meets or Exceeds UL Standards Regarding Exposed Threads Within Box.
Meets or Exceeds NEC® Safety Codes.

**Dual Mount = Box is threaded for 8-32 (ideal for box covers and lightweight fixtures) and 10-24 screws (ideal for heavier fixtures and ceiling fans).*

Romex® is a registered trademark of Southwire Company.

Call 1-800-999-2226 or visit www.westinghouselighting.com.

Westinghouse Lighting, Philadelphia, PA 19154-1029, U.S.A. Westinghouse Lighting, a Westinghouse Electric Corporation licensee
 ® "Westinghouse" and "You can be sure...if it's Westinghouse" are all registered trademarks of Westinghouse Electric Corporation.

